

**PL-TR-96-2253**

**ARRAY DETECTION OF RIPPLE-FIRED  
SIGNALS: THE CEPSTRAL F-STATISTIC**

**Robert H. Shumway**

**University of California  
Division of Statistics  
Davis, CA 95616-8705**

**30 September 1996**

**Scientific Report Number 1**

**19970109 073**

**Approved for public release; distribution unlimited**



**PHILLIPS LABORATORY  
Directorate of Geophysics  
AIR FORCE MATERIEL COMMAND  
HANSCOM AFB, MA 01731-3010**

SPONSORED BY  
Air Force Technical Applications Center  
Directorate of Nuclear Treaty Monitoring  
Project Authorization T/5101


MONITORED BY  
Phillips Laboratory  
CONTRACT No. F19628-95-K-0010

The views and conclusions contained in this document are those of the authors and should not be interpreted as representing the official policies, either express or implied, of the Air Force or U.S. Government.

This technical report has been reviewed and is approved for publication.



DELAINE REITER  
Contract Manager  
Earth Sciences Division

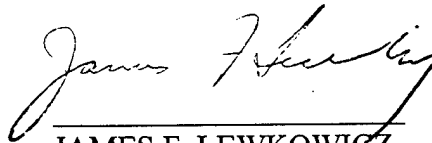

JAMES F. LEWKOWICZ  
Director  
Earth Sciences Division

This report has been reviewed by the ESD Public Affairs Office (PA) and is releasable to the National Technical Information Service (NTIS).

Qualified requestors may obtain copies from the Defense Technical Information Center. All others should apply to the National Technical Information Service.

If your address has changed, or you wish to be removed from the mailing list, or if the addressee is no longer employed by your organization, please notify PL/IM, 29 Randolph Road, Hanscom AFB, MA 01731-3010. This will assist us in maintaining a current mailing list.

Do not return copies of this report unless contractual obligations or notices on a specific document requires that it be returned.

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE 30 Sept. 1996	3. REPORT TYPE AND DATES COVERED Scientific No. 1	
4. TITLE AND SUBTITLE Array Detection of Ripple-Fired Signals: The Cepstral F-Statistic			5. FUNDING NUMBERS F19628-95-K-0010 PE35999E PR5101 TA GM WU AL	
6. AUTHOR(S) Robert H. Shumway				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Division of Statistics University of California Davis CA 95616-8705			8. PERFORMING ORGANIZATION REPORT NUMBER Division of Statistics Tech. Report # 326	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Phillips Laboratory 29 Randolph Road Hanscom AFB, MA 01731-3010 Contract Manager: Delaine Reiter/GPE			10. SPONSORING/MONITORING AGENCY REPORT NUMBER  PL-TR-96-2253	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  Time and frequency domain approaches to detecting a consistent pattern of reflections on an ensemble of seismic recordings are developed. Such patterns are characteristic of mining bursts and not of nuclear explosions or earthquakes so that detecting a ripple delay structure can serve as one component for discrimination.  In the frequency domain approach, a generalization of cepstral analysis is used to derive an F-Statistic for detecting delay-fired events. Detrended log spectra are considered as realizations of a stationary process whose periodic components are quefrencies, with periods proportional to delay time differences. An F-Statistic is derived that is proportional to the stacked cepstrum and the spectrum of the stacked log spectra. Advantages of the cepstral F-Statistic accrue from better resolution and the fact that statistical significance can be established for delay peaks. It is also easily incorporated into automatic detection systems.  The frequency domain approach is compared to a time domain approach that involves searching seasonal autoregressive models with a fixed regular delay structure. Simulated array data and data from a number of mining explosions, measured at ARCESS, are analyzed by both approaches.				
14. SUBJECT TERMS Mining explosions, cepstral F, duration and delay, seasonal ARMA			15. NUMBER OF PAGES 34	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT unclassified	20. LIMITATION OF ABSTRACT SAR	

## TABLE OF CONTENTS

1. Introduction.....	1
2. Models for Ripple-Fired Signals.....	3
3. Cepstral Analysis .....	6
4. Seasonal ARMA Searching .....	13
5. Analysis of Kola Mining Explosions.....	14
6. Discussion.....	21
7. References .....	22

## FIGURES


1: A Mine Blast Observed at ARCESS and the Extracted $P_n$ Phase (40 pts per second).....	2
2: A Contrived Array With Delay Firing ( $d=8,15,23,30$ ) and the Associated Detrended Log Spectra. ....	4
3: Observed Log Spectrum and Spline-Detrended Log Spectrum. ....	7
4: Average of Detrended Log Spectra. ....	9
5: Cepstra of Contrived Array Data (Delay in pts).....	11
6: Cepstral Analysis of Variance and F-Statistic for Contrived Data (Delay in pts). 12	
7: BIC Contour For Contrived Event (delay= $d-2$ vs number of reflections $n$ , darker denotes smaller BIC). ....	15
8: Array Recordings of $P_n$ Phases for Event 110. Recorded at ARCESS Compared With Noise Preceding Signal (40 pts/sec).....	16
9: Observed Log Spectrum and Spline-Detrended Log-Spectrum for $P_n$ Phase at a Single Channel, Event 110. ....	17
10: Cepstral Analysis of Variance and F-Statistic for $P_n$ Phase, Event 110 (Delay in pts). ....	18
11: Cepstral Analysis of Variance and F-Statistic for Noise Preceding the $P_n$ Phase, Event 110 (Delay in pts). ....	19
12: BIC Contours For $P_n$ Phase, Event 110 (delay= $d-2$ vs number of reflections $n$ , darker denotes smaller BIC). ....	20

## 1. Introduction

Regional seismic monitoring and discrimination capabilities that are desirable under a potential Comprehensive Test Ban Treaty (CTBT) can be improved by developing algorithms and new procedures for distinguishing between earthquakes, nuclear explosions and mining explosions of various kinds. Much effort in past discrimination studies has concentrated on extracting various features of the spectrum that are characteristic of earthquakes, nuclear explosions or mine blasts.

One particular spectral feature that characterizes some mining explosions is a modulation of the spectrum introduced by a ripple-fired explosion. A ripple-fired event usually involves detonation of a number of explosions that are often regularly grouped in space and time. Such explosions, known as quarry blasts, have low magnitudes that may be close to those of nuclear explosions that one might monitor under the CTBT. As examples of these kinds of mine blasts, we consider using array data from ARCESS previously analyzed by Der et al (1993). Figure 1 shows a single channel from a typical mine blast, sampled at 40 points per second, with the four main arrival phases identified. We concentrate, in this discussion, on the  $P_n$  phase shown in the lower panel. Echoes due to ripple-firing that might be seen in such data for mining explosions would be over .1 seconds and would be aliases of the reflections generated by the firing configurations which probably involve shorter delays. A number of authors have examined various aspects of this problem and have proposed techniques for analyzing these ripple-fired seismic signals. Chapman et al (1992) show reflection patterns for a number of delay-fired configurations and propose a cepstral deconvolution method for estimating the delays. Baumgardt and Ziegler (1988) consider lining up the log-spectra and cepstra for an array and looking for common reflection patterns. Alexander et al (1995) extend this analysis by adding up or *stacking* the spectra. Hedlin et al (1990) propose graphical techniques involving threshold modifications of the time varying log-spectra and cepstra.

The approaches of Alexander et al (1995) and Baumgardt and Ziegler (1988) are based on the premise that a common reflection pattern should appear at each channel on the array. We consider exploiting that idea further by developing a test statistic for detecting a common set of periodic components on an array of suitably detrended log-spectra. In our approach, detrended log-spectra are considered as realizations of stationary processes whose periodic signal components are quefrequencies, with periods proportional to delay time differences. Using an approach proposed by Shumway (1971) for detecting a common signal in a collection of stationarily correlated series, an F-Statistic is derived that is proportional

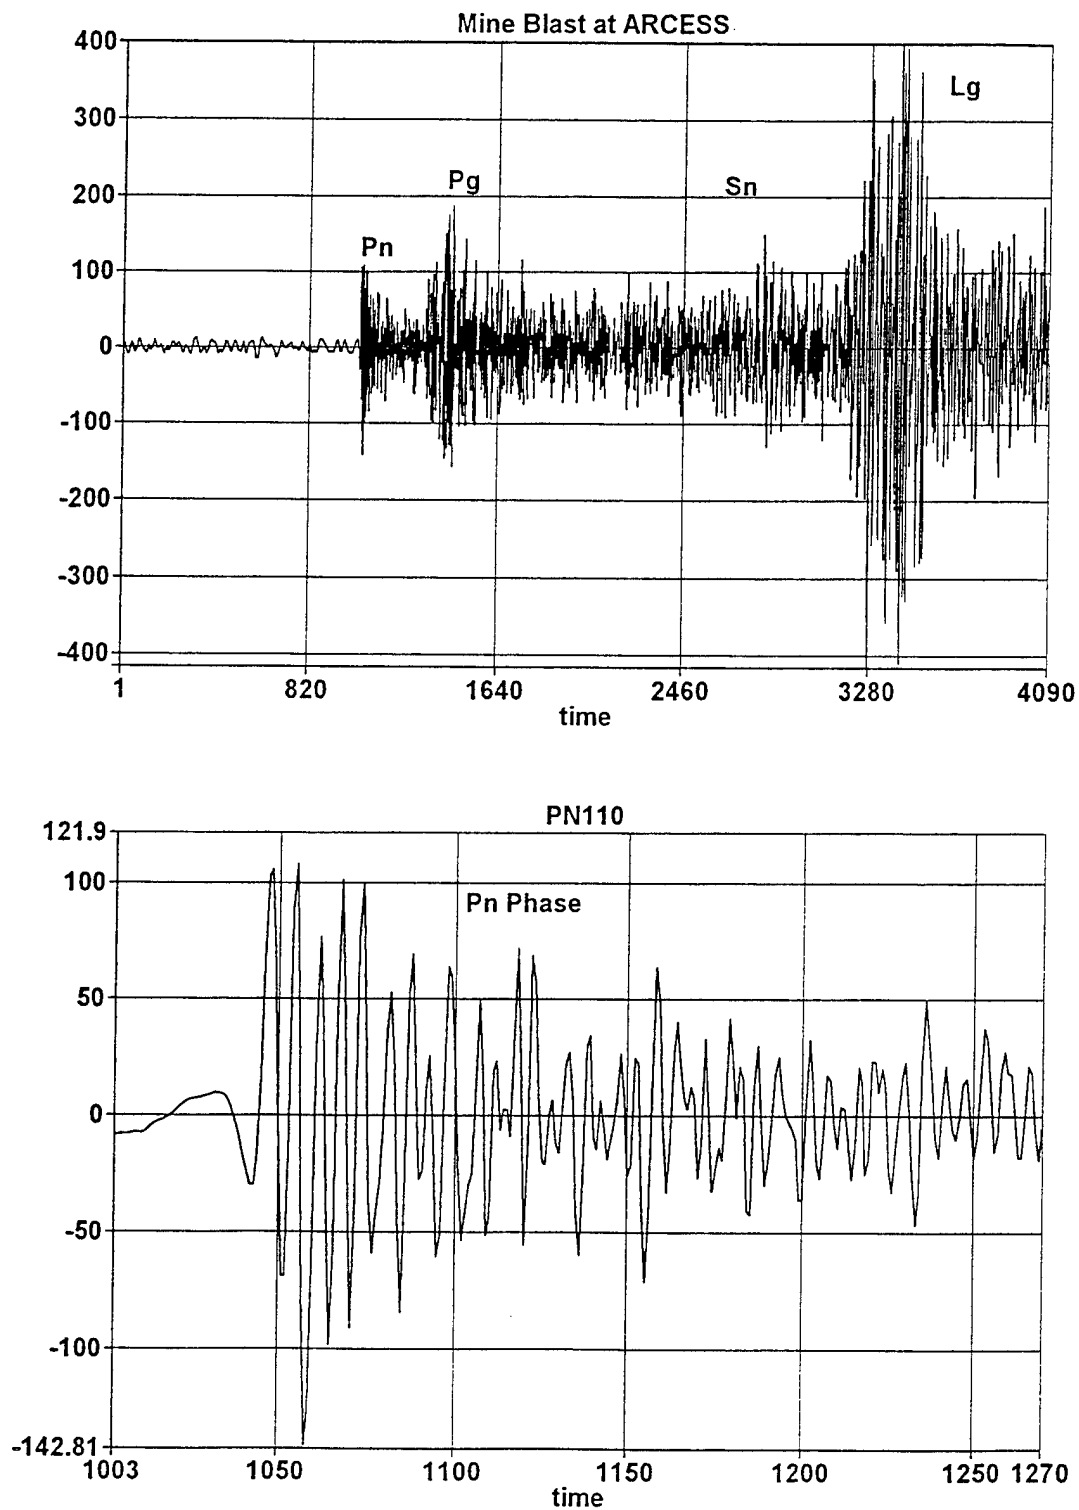

**Figure 1:** A Mine Blast Observed at ARCESS and the Extracted  $P_n$  Phase (40 pts per second).

to the *stacked cepstrum* and the *spectrum of the stacked log-spectra*. Advantages of this cepstral F-Statistic stem from its superior resolving power and the fact that statistical significance can now be asserted for selected delay peaks.

The frequency domain approach proposed above will be compared to a time domain approach that assumes *multiplicative seasonal autoregressive moving-average (ARMA) models* with a fixed regular delay structure on each channel. In general, the reflection delay corresponds to the seasonal lag of the moving average and the duration is proportional to the order. The low-order autoregressive component models the combined effects of source, path and instrument response. Seasonal ARMA models are searched over a number of plausible delays and duration, with the best value of a Bayesian information criterion BIC used to select the best model.

Simulated array data and data from a number of mining explosions, measured at ARCESS in Scandinavia, will be used to compare the time and frequency domain approaches. The organization of the report is to define the multiplicative signal model used in both approaches in Section 2. The frequency domain approach leading to the cepstral F-Statistic is derived in Section 3. Section 4 covers the competing seasonal ARMA search time domain approach and Section 5 uses both techniques to identify possible ripples in a set of 9 mining explosions. We make recommendations for further data analyses in the final section.

## 2. Models for Ripple-Fired Signals


A general model that seems to be useful for modeling ripple-firing follows from assuming the presence of a random signal that repeats at delays  $\tau_1, \tau_2, \dots, \tau_n$  with amplitudes  $\theta_1, \theta_2, \dots, \theta_n$  on each channel of an array. This leads to a general model of the form

$$y_j(t) = \sum_{k=1}^n \theta_k s_j(t - \tau_k) \quad (1)$$


for the received signal  $y_j(t), t = 1, \dots, T$  at each of  $j = 1, 2, \dots, N$  channels. Here,  $s_j(t)$  are input signals, assumed to differ over the array. It is conventional to take  $\theta_1 = 1$ . For simplicity, we assume signals which are random and uncorrelated between channels with spectral density  $P_j^s(\nu)$  at frequency  $\nu, -.5 \leq \nu \leq .5$ , in cycles per point. This assumption may not always be realistic, but the coherence between elements for the mining explosions here was fairly low although we observed some differences in the spectra between channels. To illustrate, Figure 2 shows a contrived array, generated with a random signal and delays



**Stacked plot of Simulated Data**

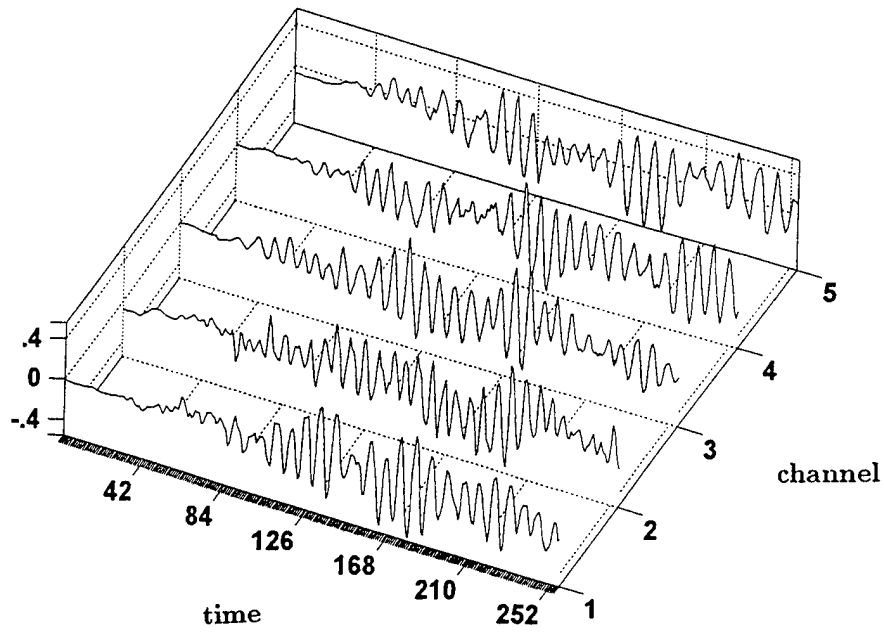

**Stacked plot of Simulated Data Log Spectra**

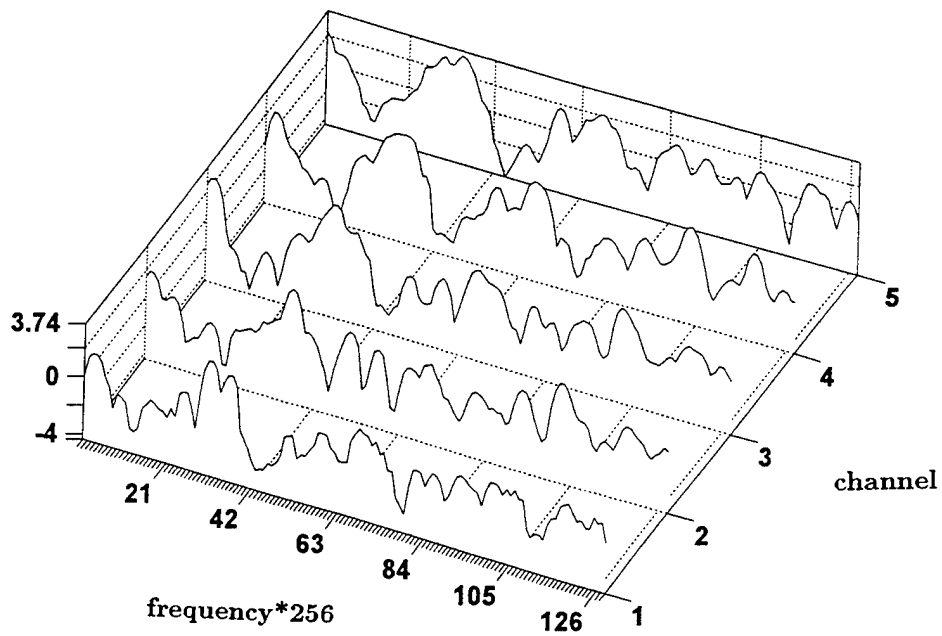

**Figure 2: A Contrived Array With Delay Firing ( $d=8,15,23,30$ ) and the Associated Detrended Log Spectra.**

$\tau_1 = 0, \tau_2 = 8, \tau_3 = 15, \tau_4 = 23, \tau_5 = 31$  and amplitudes  $\theta_1 = 1, \theta_2 = .9, \theta_3 = .9, \theta_4 = .6, \theta_5 = .7$ . Note that the signals are not unlike those contrived series shown in Figure 1.

The model implies that power spectrum of the received signal at channel  $j$  has the form

$$P_j(\nu) = |\theta(\nu)|^2 P_j^s(\nu) \quad (2)$$

where

$$|\theta(\nu)|^2 = \sum_{k=1}^n \sum_{\ell=1}^n \theta_k \theta_\ell \cos[2\pi\nu(\tau_k - \tau_\ell)]. \quad (3)$$

and  $P_j^s(\nu)$  is the spectrum of  $s_j(t)$ . It follows that the overall spectrum on channel  $j$  factors into a product of the signal spectrum and a transfer function that is periodic, with quefrequencies that are proportional to the time delay differences  $\tau_k - \tau_\ell$  for all  $k, \ell$ . It is clear that taking logarithms, say

$$\log P_j(\nu) = \log |\theta(\nu)|^2 + \log P_j^s(\nu), \quad (4)$$

breaks the product into a sum of two terms consisting of the periodic component and the signal spectrum that differs on each channel. Since the signal spectrum,  $P_j^s(\nu)$ , is generally a smooth function, it is natural to consider the result of fitting a polynomial spline function for the signal to each channel and then adjusting the log-spectrum, in order to obtain a stationary looking series with strong periodicities at the time delay differences. Following through on this procedure leads to the adjusted log-spectra in the lower panel of Figure 2. We note the periodic and stationary appearance of the series; this observation serves as the basis for the frequency domain approach.

In order to develop the time domain approach, we consider a simplified finite parameter model, with the time delays restricted to be multiples of some underlying time delay  $d$ , say  $\tau_k = kd$ . Then, (1) becomes

$$y_j(t) = \sum_{k=1}^n \theta_k s_j(t - kd), \quad (5)$$

where the signal satisfies a some low-order autoregressive model, say

$$s_j(t) - \phi_1 s_j(t-1) - \phi_2 s_j(t-2) = w_j(t), \quad (6)$$

with  $w_j(t)$  taken as white noise series with common noise variance  $\sigma^2$ . The low-order AR model tends to emulate the smooth spectral component of the multiplicative model, since the spectrum of the received process given in (2) can now be simplified to

$$P_j(\nu) = \frac{|\theta(\nu)|^2}{|\phi(\nu)|^2} \sigma^2, \quad (7)$$

where

$$|\phi(\nu)|^2 = |1 - \phi_1 \exp\{-2\pi i\nu\} - \phi_2 \exp\{-4\pi i\nu\}|^2. \quad (8)$$

and the signal spectrum in (2) is assumed to have the form

$$P_j^s(\nu) = \frac{\sigma^2}{|\phi(\nu)|^2} \quad (9)$$

which emulates the combination of the source, path and instrument spectra. The forms of (5) and (6) also suggest the time domain approach proposed in Section 4.

### 3. Cepstral Analysis

To follow up on the suggestion in Section 2, based on the additive decomposition (4), we consider computing the logarithm of the spectral estimator at a single channel as shown, for example, in the top panel of Figure 3 for the contrived data. We envision the signal spectrum as a relatively smooth function that can be approximated by a cubic spline with one knot, i.e.

$$\log P_j^s(\nu) \approx a_{j0} + a_{j1}\nu + a_{j2}\nu^2 + a_{j3}\nu^3 + a_{j4}(\nu - \nu_f)_+^3,$$

where  $\nu_f$  is the knot location and  $(\nu - \nu_f)_+^3$  is zero for  $\nu < \nu_f$ . We may estimate the parameters and consider the *detrended* log-spectrum as

$$\log P_j(\nu) - \log P_{s_j}(\nu) = \log \frac{P_j(\nu)}{P_{s_j}(\nu)}.$$

The detrended log-spectrum is shown in the lower panel of Figure 3 and seems clearly like a stationary process with periodic components that one could isolate by computing the spectrum of the log-spectrum, i.e. the cepstrum. Looking back at the bottom panel of Figure 2 verifies that all channels seem to carry the same periodicities and are relatively stationary.

This motivates an approach similar to that given in Shumway (1971), where the Fourier transform, say

$$Q_j(d) = FT \left\{ \log \frac{P_j(\nu)}{P_{s_j}(\nu)} \right\} \quad (10)$$

is regarded as behaving like the transform of a stationary process in the delay  $d$  at each channel so that one may write the signal plus noise model

$$Q_j(d) = S(d) + V_j(d). \quad (11)$$

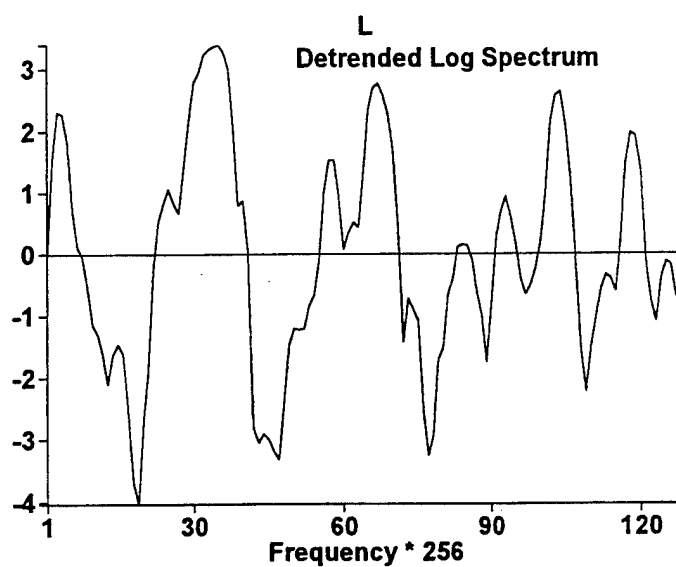
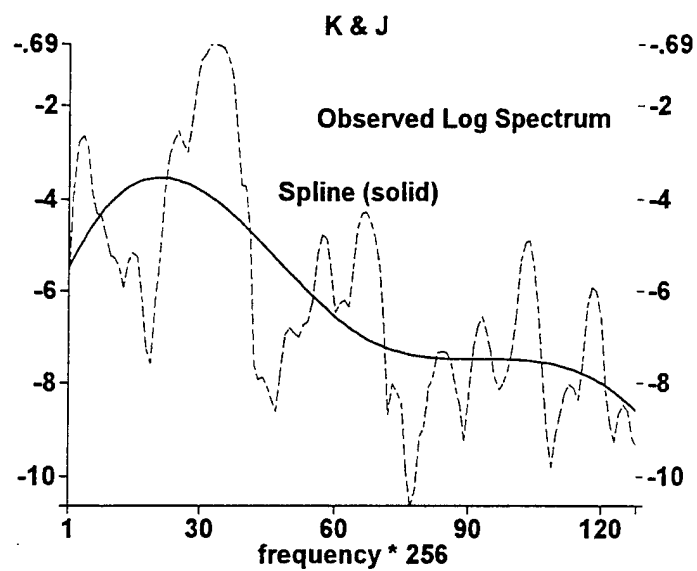


Figure 3: Observed Log Spectrum and Spline-Detrended Log Spectrum.

Here, the signal transform is fixed and unknown and the noise  $V_j(d)$  has a complex Gaussian distribution with mean 0 and variance  $\sigma^2(d)$  at delay  $d$ . Then, motivated by the classical approach to detecting a signal in  $N$  stationarily correlated time series, we note that testing the hypothesis  $S(d) = 0$  leads to an F-Statistic involving the *stacked cepstrum*

$$SCT(d) = \sum_{j=1}^N |Q_j(d)|^2 \quad (12)$$

and the spectrum of the *stacked log spectra*, say

$$SCM(d) = N|\bar{Q}(d)|^2, \quad (13)$$

where

$$\bar{Q}(d) = N^{-1} \sum_{j=1}^N Q_j(d) \quad (14)$$

is the mean Fourier transform of the array log-spectra. Figure 4 shows a mean of the array log-spectra and we note that the common periodicities observed in the bottom panel of Figure 2 are enhanced in the stack. An important quantity involved in the optimal detection statistic is the *error cepstrum*, defined as

$$\begin{aligned} SCE(d) &= \sum_{j=1}^N |Q_j(d) - \bar{Q}(d)|^2 \\ &= SCT(d) - SCM(d) \end{aligned} \quad (15)$$

which is a measure of the extent to which the individual channel transforms differ from the mean transform. It can be interpreted as the *cepstral noise* component. The F-Statistic resulting from the signal detection hypothesis is given by

$$F_{2,2(N-1)}(d) = (N-1) \frac{SCM(d)}{SCE(d)} \quad (16)$$

and can also be interpreted as a cepstral *signal to noise ratio*. The subscripts refer to an F distribution with 2 and  $2(N-1)$  degrees of freedom.

The information above can be summarized in a *cepstral analysis of variance (ANOVA)* table as shown following Figure 4.

Stacked plot of Stacked Average Detrended Log Spectra ave. s

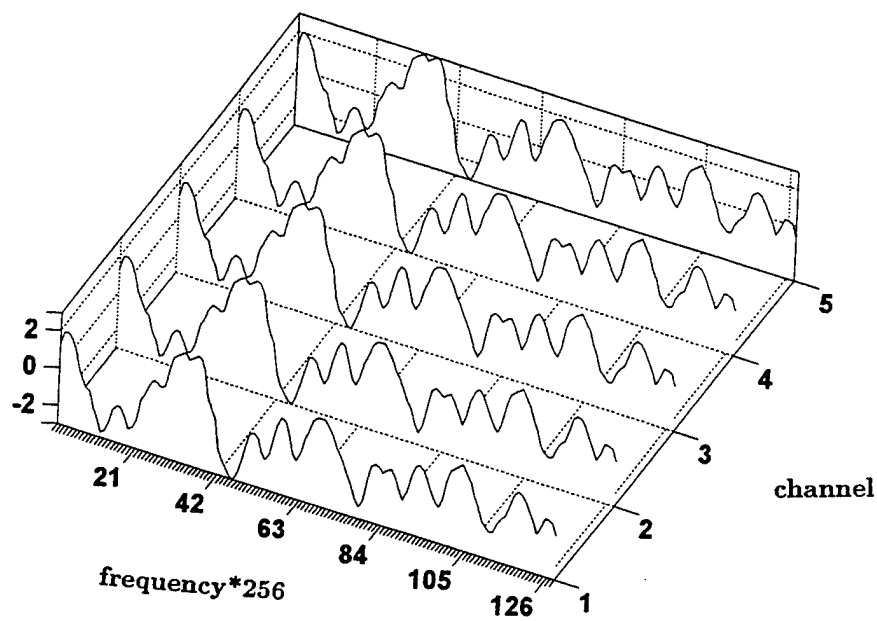


Figure 4: Average of Detrended Log Spectra.

**Table 1:** Cepstral ANOVA at Delay  $d$ 

Source	Cepstral Sum of Squares	df	Mean Square
Signal	$SCM(d) = N \bar{Q}(d) ^2$	2	
Noise	$SCE(d) = \sum_{j=1}^N  Q_j(d) - \bar{Q}(d) ^2$	$2(N - 1)$	$\hat{\sigma}^2(d)$
Stack	$SCT(d) = \sum_{j=1}^N  Q_j(d) ^2$	$2N$	

Table 1 shows the partition of the total cepstral sum of squares or stacked spectrum into components corresponding to the signal and noise. Note that the total cepstrum is exactly the *sum-stack* proposed by Alexander et al (1995), computed by adding up the separate cepstra shown in Figure 5. Alexander et al have also considered the product-stack which does not appear to have any identifiable statistical properties and we do not analyze it here. It is clear that the sum-stack will not reflect the common signal components as well as either the cepstral component due to the signal (see Figure 4 for the log-spectral stack) or the F-Statistic (16). Note also that the estimated noise cepstrum is computed from Table 1 by

$$\hat{\sigma}^2(d) = \frac{SCE(d)}{2(N - 1)} \quad (17)$$

Figure 6 shows the components of the cepstral variance and the F-Statistic corresponding to the contrived data shown in Figure 2. The solid line in the upper panel represents the total or sum-stacked cepstrum of Alexander et al (1995), i.e.  $SCT(d)$  in the equations and Table 1. Note the strong component appearing delays 8, 15, 23, 30 and 36 points as may be compared with the known true delays 8, 15 23 and 31 points. Note that the true time delays would imply quefrequencies of the form 7, 8, 15, 16, 23 and 31 points respectively. The noise cepstrum,  $SCE(d)$ , is also shown as the dotted line in the upper panel and we note that it is quite small for this simulated example. The cepstral F-Statistic, shown in the lower panel of Figure 6, provides a statistical level of significance for the various peaks and we note that the significant peaks are 8, 16, 23 and 30 points so that the smallest of the larger peaks at  $d=36$  in the stacked cepstrum is not significant. All peaks are significant at a false alarm rate of .001. In general, since there are often a large number of delays of interest, one should insist on at least .01 as a level of significance.



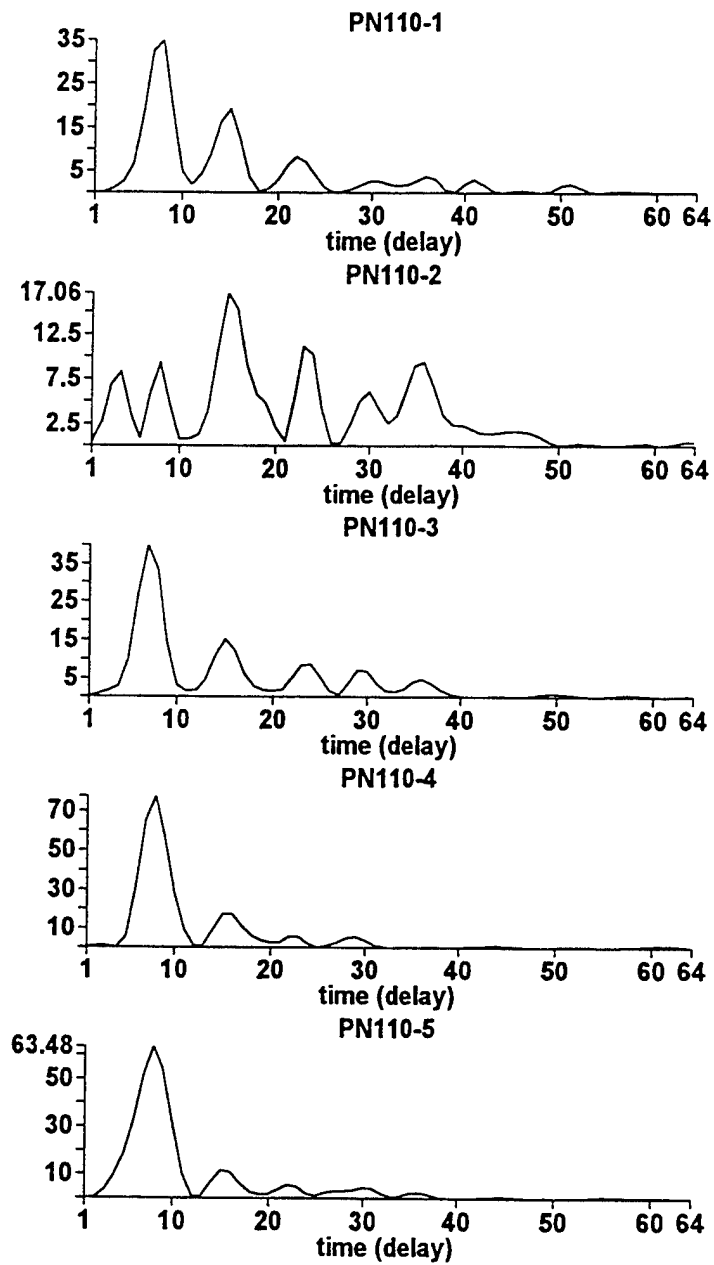


Figure 5: Cepstra of Contrived Array Data (Delay in pts).

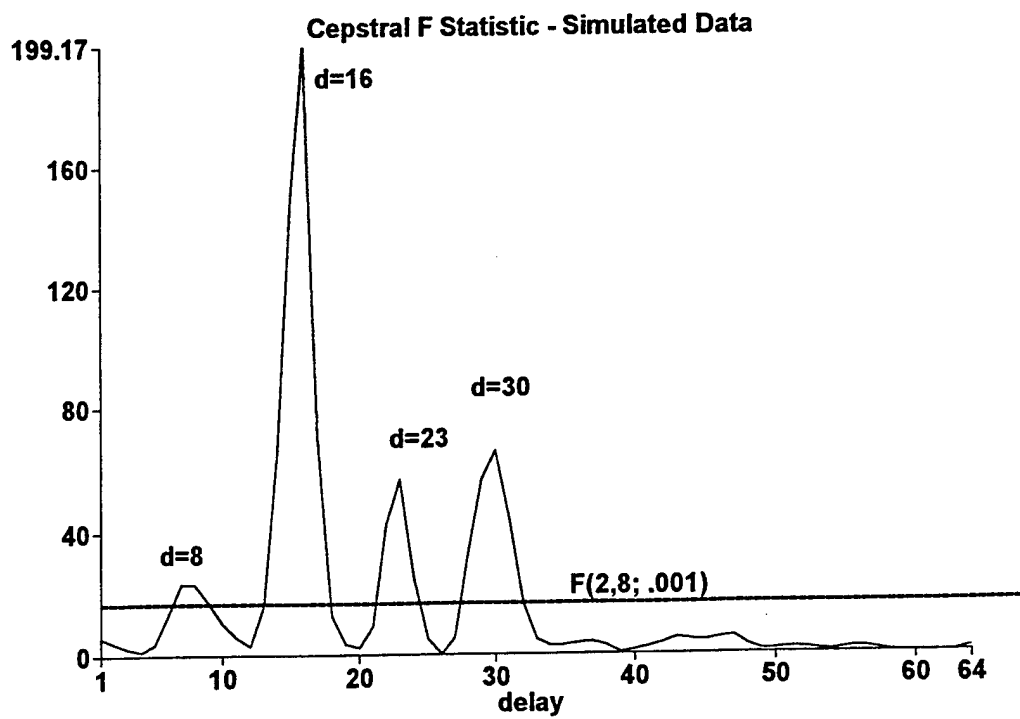

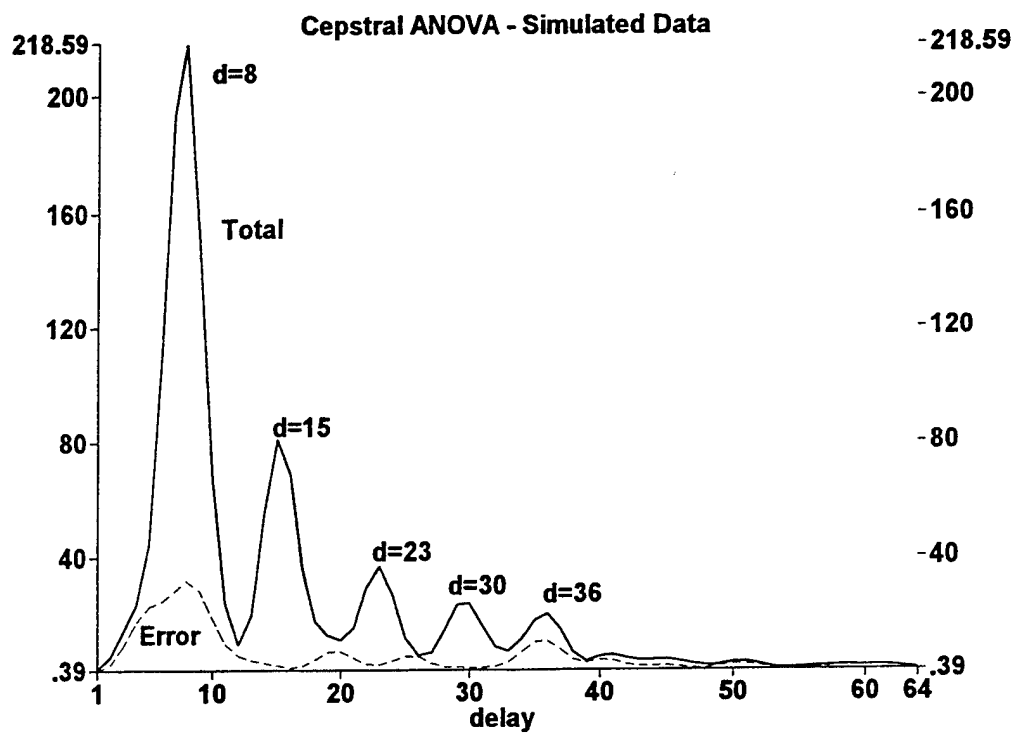

**Figure 6:** Cepstral Analysis of Variance and F-Statistic for Contrived Data (Delay in pts).

#### 4. Seasonal ARMA Searching

The cepstral approach is an example of a nonparametric procedure since it requires only that the signal spectrum be relatively smooth and that we only want to identify the periodicities associated with the time delay differences. One may also consider more parametric approaches where the problem can be identified as one of estimating the  $\theta_1, \theta_2, \dots, \theta_n, \phi_1, \phi_2$  and  $\sigma^2$ , using the received series  $y_1(t), \dots, y_N(t)$  for  $t = 1, \dots, T$  and the model as given by (5) and (6). Parametric approaches will also involve estimating the number of reflections  $n$  and settling on a time delay  $d$ . If the structure of the reflection sequence is unknown, one can also consider multiple deconvolution techniques as in Der et al (1987). Single channel deconvolution techniques may also be applied. Approaches based on a frequency domain to the likelihood function are often useful, as in Hannan and Thomson (1974) or in Shumway and Blandford (1978). Several preliminary trials of these general methods seem to be ineffective for the current problem where one has a large number of unknown reflections with unknown delays. The parametric model in (5) and (6) seems to offer a plausible alternative to the nonparametric cepstral approach and we investigate this methodology here. Note that Shumway and McQuarrie (1994) investigated this technique in the single channel case.

Minimizing the sum of squared errors for specified values of  $n$  and  $d$  leads to the objective function

$$SSE(\theta_1, \theta_2, \dots, \theta_n, \phi_1, \phi_2) = \sum_{j=1}^N \sum_{t=nd}^T w_j^2(t), \quad (18)$$

which maximizes the log likelihood and we may estimate  $\sigma^2$  as

$$\hat{\sigma}^2 = \frac{1}{NT'} \sum_j \sum_t \hat{w}_j^2(t), \quad (19)$$

where the nonlinear optimization only involves  $T' = N(T - nd + 1)$  residuals. In order to select a model, we choose  $n$  and  $d$  as the joint minimizers of the *Bayesian Information Criterion (BIC)*, say

$$BIC(n, d) = \log \hat{\sigma}^2 + \frac{(n+2) \log(NT')}{NT'}. \quad (20)$$

For a summary of the nonlinear Gauss-Newton estimation procedure applied to the repeated measures ARMA model, see Shumway(1988).

To give an example, consider searching the contrived data in Figure 2 for the best fitting seasonal ARMA process. It is convenient to limit the number of reflections to the

possible range  $1 \leq n \leq 6$  and the delays to the range  $3 \leq d \leq 12$ . We begin with  $d = 3$  so as not to confuse the delays with the first two lags of the autoregressive part. Figure 7 shows the resulting values of  $BIC$  and we note that there are a number of local minima, mostly occurring at  $d = 8$ . An approximation to the correct model is  $n = 5, d = 8$  which also is the global minimum of  $BIC$  in Figure 7. The time domain approach has more difficulty estimating  $n$  in this case, with local minima occurring for  $n = 1, 2, 3$  and  $d = 8$ . Note also that the region defined by  $n = 5, 6, d = 7$  is also a possible model. In summary, there are more possible interpretations for the ultimate model implied by the time domain analysis and few approximate statistical significance tests are available for the number of reflections. One might consider testing against a model with  $n = 0$ , but we did not do so because of the number of possible alternatives.


## 5. Analysis of Kola Mining Explosions

We consider applying the frequency and time domain methods to a population of 9 mining explosions from the Kola Peninsula (situated in the Russian Arctic), all at the HD9 quarry, observed at 5 channels of the ARCESS array in northern Norway (see Der et al, 1987). The mini-array consists of a three-component array augmented by two vertical instruments from the C-Ring.

To begin, Figure 8 shows the  $P_n$  phase from event number 110 observed at ARCESS and we note that the detrended log-spectra show evidence of periodicities. Figure 9 shows the original log-spectrum observed at a single channel along with the fitted spline which contained a single not at  $\nu_f = .25$  cycles per point, or half the folding frequency. Since we are considering data at 40 points per second, the folding frequency is 20 Hz and the knot occurs at 10 Hz. Performing the cepstral analysis of variance and computing the F-Statistic in Figure 10 indicates the presence of statistically significant peaks at 24 and 34 or .60 and .85 seconds. There are also peaks at .18 and .35 seconds of lesser (.05 level) significance. One might tentatively hypothesize ripple-firing with delays of about .18-.25 seconds. It is interesting also to check the noise before the signal for possible delays that are not due to ripple-firing. Figure 11 shows the cepstral analysis of variance for this case and we only identify some very low quefrequencies at a very low significance level (.05). Applying the time domain approach, as in Figure 12, shows possible consistent delays at delay 7 or .18 seconds and a secondary set of minima at delay .28 seconds.


We have also analyzed the  $P_n$  phases from eight additional mining explosions and the results are shown in Table 2. Only peaks that are significant at level .01 are quoted. The

Stacked plot of Simulated Data (5,8) BIC

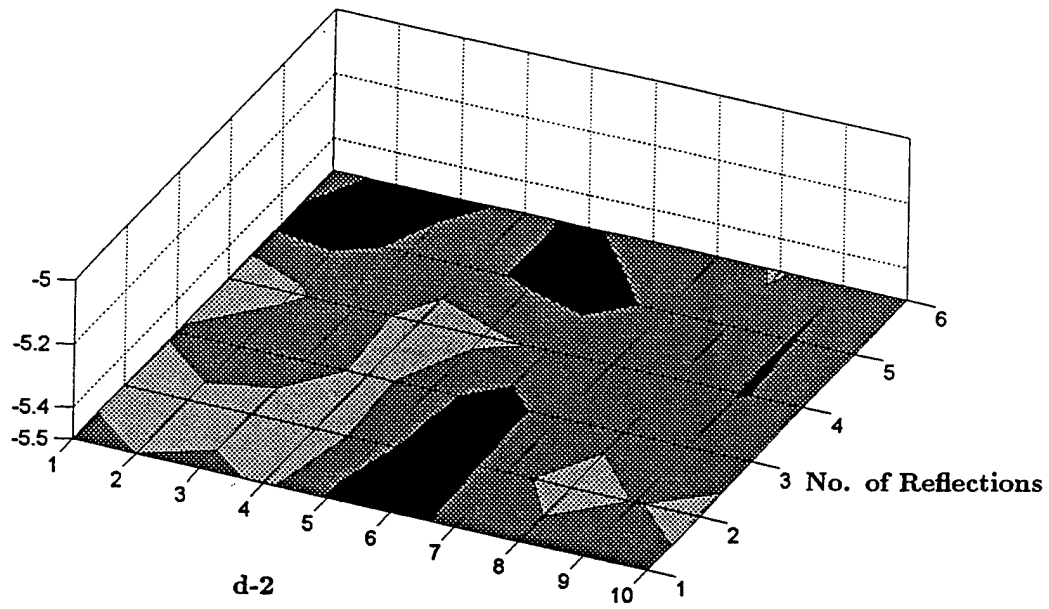

**Figure 7:** BIC Contour For Contrived Event (delay= $d-2$  vs number of reflections  $n$ , darker denotes smaller BIC)

Stacked plot of PN110 Signal

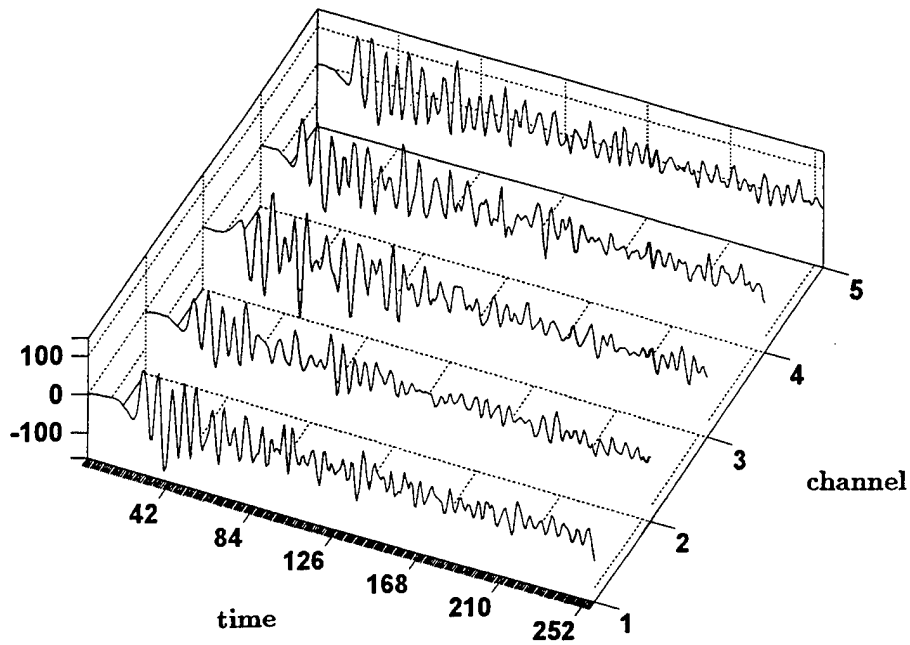

Stacked plot of PN110 Noise





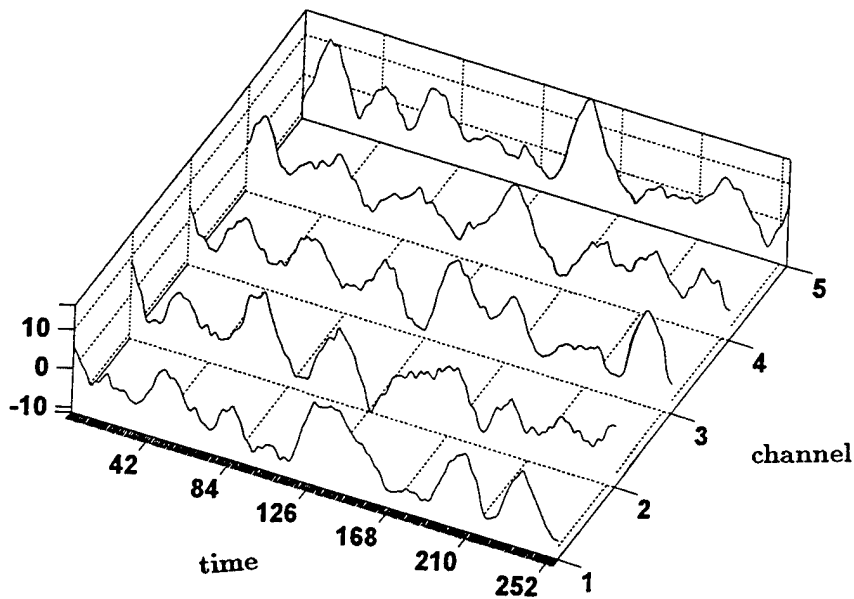




Figure 8: Array Recordings of  $P_n$  Phases for Event 110 Recorded at ARCESS Compared With Noise Preceding Signal (40 pts/sec)

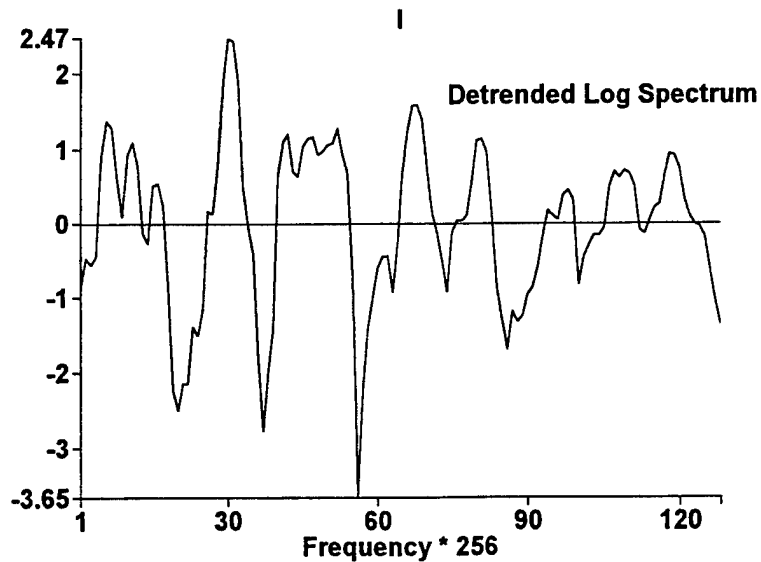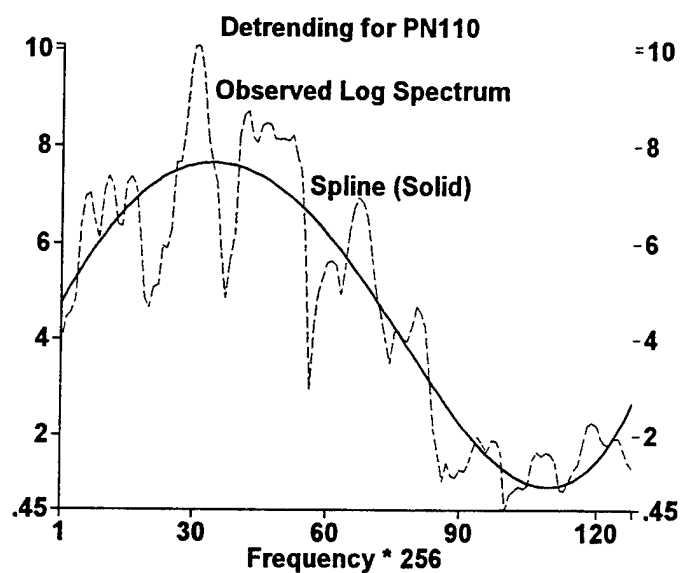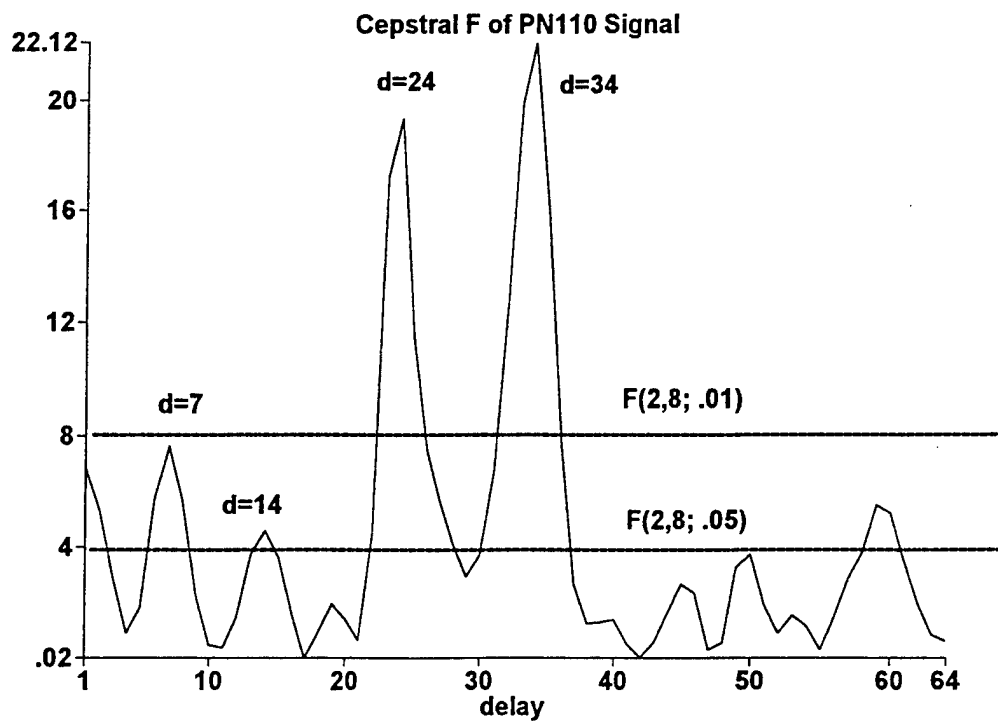

**Figure 9:** Observed Log Spectrum and Spline-Detrended Log Spectrum for  $P_n$  Phase at a Single Channel, Event 110.

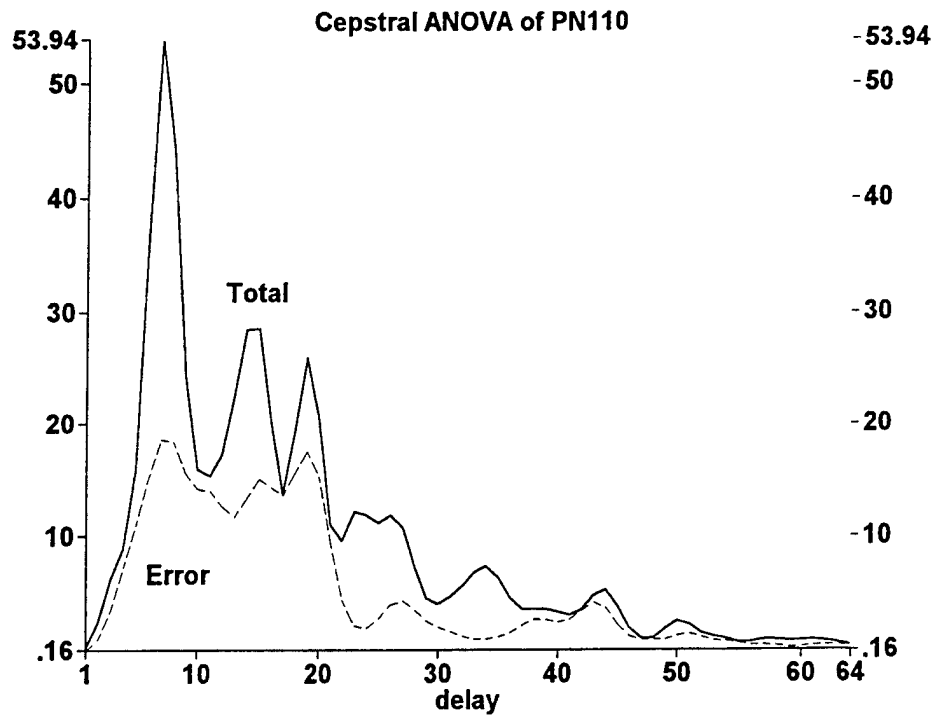


**Figure 10:** Cepstral Analysis of Variance and F-Statistic for  $P_n$  Phase, Event 110 (Delay in pts).

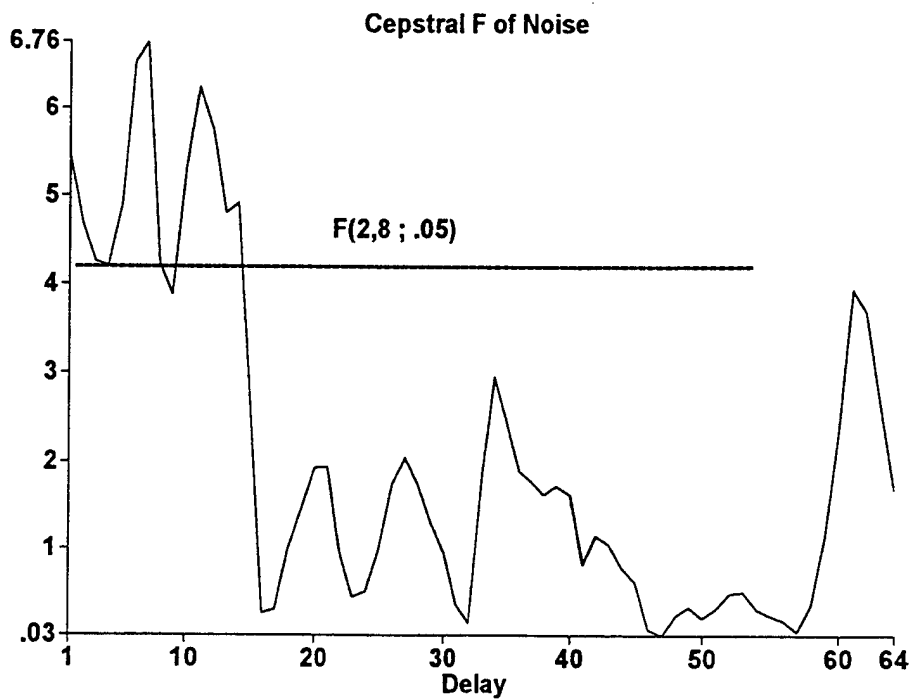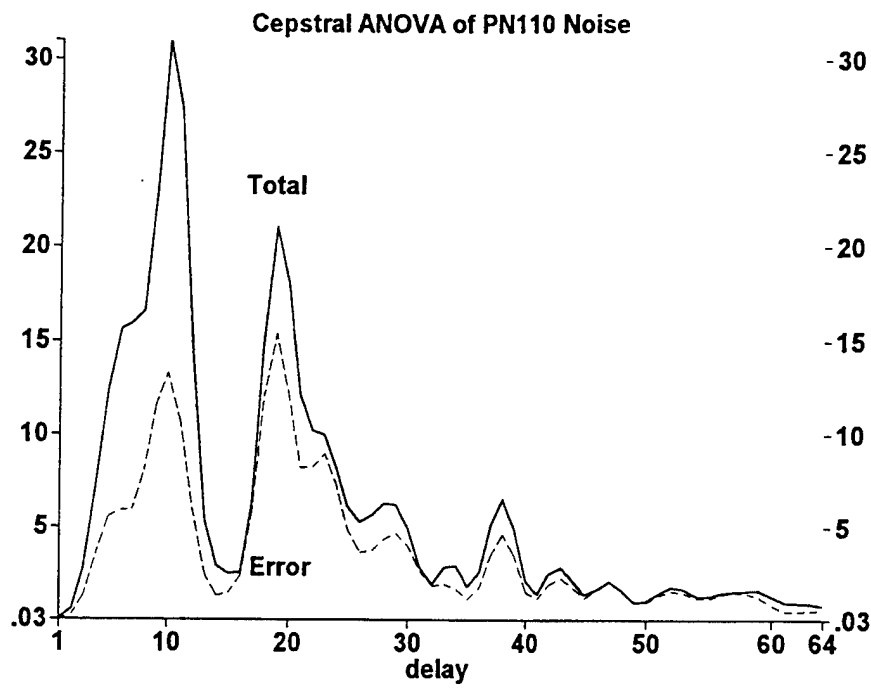

**Figure 11:** Cepstral Analysis of Variance and F-Statistic for Noise Preceding the  $P_n$  Phase, Event 110 (Delay in pts).



Stacked plot of PN110 BIC

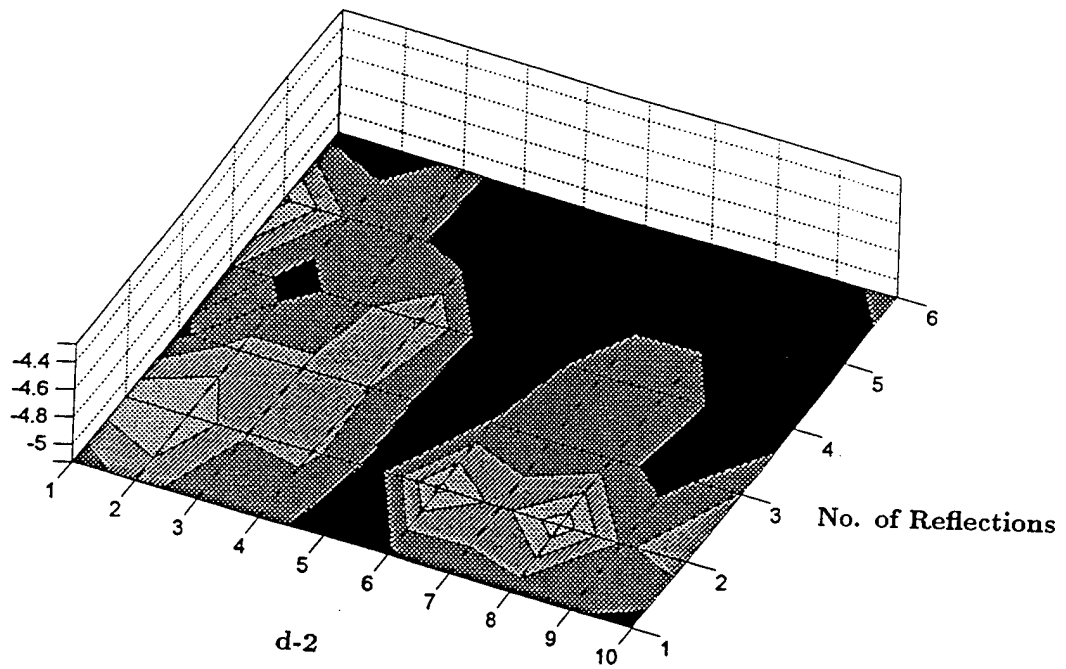

**Figure 12:** BIC Contours For  $P_n$  Phase, Event 110 (delay= $d-2$  vs number of reflections  $n$ , darker denotes smaller BIC).

results are mixed, with the time and frequency domain results not matching in a number of cases. Analyzing the  $L_g$  phases produced results that were roughly consistent with the  $P_n$  analyses but several cases such as events 054 and 066 showed no signs of ripple-firing.

**Table 2:** Estimated Time Delays for HD9 Explosions (in seconds)

Event	F-Statistic		SARMA Search
	$P_n$	$L_g$	$P_n$
054	.06	-	.075,.125
066	.25,.58	-	.05
110	.60,.85	.30,.85	.18,.23
147	.18,.50	.18	.18
182	.50, 1.08	.53, 1.08	.15
219	.38,.60,.75	.28,.38	.18
246	.30, .58, 1.23	.33, .80	-
282	.30,.50,.63,.78, 1.13	1.53, 1.98	-
285	.58,.65,.98	.18,.48	.18

## 6. Discussion

We have developed frequency and time domain approaches to detecting ripple-firing and have tested these methods, both on simulated data and on very small arrays of real data. In general, the frequency domain method, leading to the cepstral F-Statistic, is preferred because the presumed irregularities that will be present in most ripple-fired signals dictate a more nonparametric approach that does not assume a given delay structure. These irregularities are due, in part, to the geometry of the firing pattern and the limitations of sampling at rates comparable to 20 Hz. The cepstral F-Statistic also achieves a resolution advantage due to dividing by the noise cepstrum. Furthermore, the F-Statistic provides a threshold for deciding whether a given delay is statistically significant.

The last comment above suggests that the F-Statistic can be easily incorporated into an automatic detection procedure through which one can tag the delays that are statistically meaningful and ignore those that are not. In this sense, it can be used as an on-line method for detecting ripple-firing as a part of an automatic monitoring system. One simply incorporates the statistic into the automatic processing scheme since it only involves

using the detrended log-spectra and the averaging operations that will produce the entries in the analysis of variance Table 1.

The question of whether currently configured array data can be used to detect ripple-firing well enough to separate mining explosions from those of other kinds has not been answered in this report. During the next phase of the project, we intend to test the cepstral F-Statistic methodology on more events from larger arrays. Larger arrays are potentially useful since they will presumably provided a greater enhancement of the common periodicities due to ripple-firing.

## 7. References

- Alexander, S.S., R.C. Hsu, S.L. Karl, I.N. Gupta and D.H. Salzberg (1995). New techniques for estimating source depth and other diagnostic source characteristics of shallow events from regional observations of P, Lg and Rg Signals, Report No. PL-TR-95- 2108, Phillips Laboratory, Directorate of Geophysics, Air Force Materiel Command, Hanscom AFB, MA 01731-3010. ADA 310037.
- Baumgardt, D.R. and K.A. Ziegler (1988). Spectral evidence for source multiplicity in explosions: Application to regional discrimination of earthquakes and explosions. *Bull. Seismolog. Soc. of Amer.*, **78**, 1773-1795.
- Bogert, B.P., M.J.R. Healy and J.W. Tukey (1962). The frequency analysis of time series for echoes: cepstrum, pseudo-autocovariance, cross cepstrum and saphe cracking. In *Proceedings of a Symposium on Time series Analysis*, ed. M. Rosenblatt. New York: John Wiley.
- Chapman, M.C., G.A. Bollinger and M.S. Sibol (1992). Modeling delay-fired explosion spectra and source function deconvolution at regional distances. *Final Report PL-TR-92-2250*, Phillips Laboratory, Directorate of Geophysics, Air Force Materiel Command, Hanscom Air Force Base, MA 01731-5000, ADA260232.
- Der, Z.A., D.R. Baumgardt and R.H. Shumway (1993). The nature of particle motion in regional seismograms and its utilization for phase identification. *Geophy. J. Int.* **115** 1012-1024.
- Der, Z.A., Shumway, R.H. and Lees, A.C.(1987). Multi-channel deconvolution of P waves at seismic arrays. *Bull. Seismolog. Soc. Amer.*, **77**, 195-211.
- Hannan, E.J. and P.J. Thomson (1974). Estimating echo times. *Technometrics*, **16**, 77-84.

Hedlin, M.A.H., J.B. Minster and J.A. Orcutt (1990). An automatic means to discriminate between earthquakes and quarry blasts. *Bull. Seismolog. Soc. Amer*, **80**, 2143-2160.

Shumway, R.H.(1971). On detecting a signal in N stationarily correlated noise series. *Technometrics*, **13**, 499-519.

Shumway, R.H. and R.R. Blandford (1978). On detecting and estimating multiple arrivals from underground nuclear explosions. *SDAC-TR-77-8*, Seismic Data Analysis Center, Teledyne Geotech, 314 Montgomery St., Alexandria, VA 22314, Sponsored by the Defense Advanced Research Projects Agency.

Shumway, R.H. (1988). *Applied Statistical Time Series Analysis*. Englewood Cliffs, New Jersey: Prentice Hall.

Shumway, R.H. and McQuarrie, A.D.R. (1994). Statistical discrimination studies for nuclear test verification. Final Report, PL-TR-94-2283, Phillips Laboratory, Directorate of Geophysics, Air Force Materiel Command, Hanscom AFB, MA 01731-3010, ADA293572.

THOMAS AHRENS  
SEISMOLOGICAL LABORATORY 252-21  
CALIFORNIA INSTITUTE OF TECHNOLOGY  
PASADENA, CA 91125

RALPH ALEWINE  
NTPO  
1901 N. MOORE STREET, SUITE 609  
ARLINGTON, VA 22209

SHELTON ALEXANDER  
PENNSYLVANIA STATE UNIVERSITY  
DEPARTMENT OF GEOSCIENCES  
537 DEIKE BUILDING  
UNIVERSITY PARK, PA 16801

MUAWIA BARAZANGI  
INSTITUTE FOR THE STUDY OF THE CONTINENTS  
3126 SNEE HALL  
CORNELL UNIVERSITY  
ITHACA, NY 14853

RICHARD BARDZELL  
ACIS  
DCI/ACIS  
WASHINGTON, DC 20505

T.G. BARKER  
MAXWELL TECHNOLOGIES  
P.O. BOX 23558  
SAN DIEGO, CA 92123

DOUGLAS BAUMGARDT  
ENSCO INC.  
5400 PORT ROYAL ROAD  
SPRINGFIELD, VA 22151

THERON J. BENNETT  
MAXWELL TECHNOLOGIES  
11800 SUNRISE VALLEY DRIVE SUITE 1212  
RESTON, VA 22091

WILLIAM BENSON  
NAS/COS  
ROOM HA372  
2001 WISCONSIN AVE. NW  
WASHINGTON, DC 20007

JONATHAN BERGER  
UNIVERSITY OF CA, SAN DIEGO  
SCRIPPS INSTITUTION OF OCEANOGRAPHY IGPP, 0225  
9500 GILMAN DRIVE  
LA JOLLA, CA 92093-0225

ROBERT BLANDFORD  
AFTAC  
1300 N. 17TH STREET  
SUITE 1450  
ARLINGTON, VA 22209-2308

STEVEN BRATT  
NTPO  
1901 N. MOORE STREET, SUITE 609  
ARLINGTON, VA 22209

RHETT BUTLER  
IRIS  
1616 N. FORT MEYER DRIVE  
SUITE 1050  
ARLINGTON, VA 22209

LESLIE A. CASEY  
DOE  
1000 INDEPENDENCE AVE. SW  
NN-40  
WASHINGTON, DC 20585-0420

CATHERINE DE GROOT-HEDLIN  
SCRIPPS INSTITUTION OF OCEANOGRAPHY  
UNIVERSITY OF CALIFORNIA, SAN DIEGO  
INSTITUTE OF GEOPHYSICS AND PLANETARY PHYSICS  
LA JOLLA, CA 92093

STANLEY DICKINSON  
AFOSR  
110 DUNCAN AVENUE, SUITE B115  
BOLLING AFB  
WASHINGTON, D.C. 20332-001

SEAN DORAN  
ACIS  
DCI/ACIS  
WASHINGTON, DC 20505

DIANE I. DOSER  
DEPARTMENT OF GEOLOGICAL SCIENCES  
THE UNIVERSITY OF TEXAS AT EL PASO  
EL PASO, TX 79968

RICHARD J. FANTEL  
BUREAU OF MINES  
DEPT OF INTERIOR, BLDG 20  
DENVER FEDERAL CENTER  
DENVER, CO 80225

JOHN FILSON  
ACIS/TMG/NTT  
ROOM 6T11 NHB  
WASHINGTON, DC 20505

MARK D. FISK  
MISSION RESEARCH CORPORATION  
735 STATE STREET  
P.O. DRAWER 719  
SANTA BARBARA, CA 93102-0719

LORI GRANT  
MULTIMAX, INC.  
311C FOREST AVE. SUITE 3  
PACIFIC GROVE, CA 93950

I. N. GUPTA  
MULTIMAX, INC.  
1441 MCCORMICK DRIVE  
LARGO, MD 20774

JAMES HAYES  
NSF  
4201 WILSON BLVD., ROOM 785  
ARLINGTON, VA 22230

MICHAEL HEDLIN  
UNIVERSITY OF CALIFORNIA, SAN DIEGO  
SCRIPPS INSTITUTION OF OCEANOGRAPHY IGPP, 0225  
9500 GILMAN DRIVE  
LA JOLLA, CA 92093-0225

EUGENE HERRIN  
SOUTHERN METHODIST UNIVERSITY  
DEPARTMENT OF GEOLOGICAL SCIENCES  
DALLAS, TX 75275-0395

VINDELL HSU  
HQ/AFTAC/TTR  
1030 S. HIGHWAY A1A  
PATRICK AFB, FL 32925-3002

RONG-SONG JIH  
PHILLIPS LABORATORY  
EARTH SCIENCES DIVISION  
29 RANDOLPH ROAD  
HANSCOM AFB, MA 01731-3010

LAWRENCE LIVERMORE NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 808, MS L-200  
LIVERMORE, CA 94551

LAWRENCE LIVERMORE NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 808, MS L-221  
LIVERMORE, CA 94551

ROBERT GEIL  
DOE  
PALAIS DES NATIONS, RM D615  
GENEVA 10, SWITZERLAND

HENRY GRAY  
SMU STATISTICS DEPARTMENT  
P.O. BOX 750302  
DALLAS, TX 75275-0302

DAVID HARKRIDER  
PHILLIPS LABORATORY  
EARTH SCIENCES DIVISION  
29 RANDOLPH ROAD  
HANSCOM AFB, MA 01731-3010

THOMAS HEARN  
NEW MEXICO STATE UNIVERSITY  
DEPARTMENT OF PHYSICS  
LAS CRUCES, NM 88003

DONALD HELMBERGER  
CALIFORNIA INSTITUTE OF TECHNOLOGY  
DIVISION OF GEOLOGICAL & PLANETARY SCIENCES  
SEISMOLOGICAL LABORATORY  
PASADENA, CA 91125

ROBERT HERRMANN  
ST. LOUIS UNIVERSITY  
DEPARTMENT OF EARTH & ATMOSPHERIC SCIENCES  
3507 LACLEDE AVENUE  
ST. LOUIS, MO 63103

ANTHONY IANNACCHIONE  
BUREAU OF MINES  
COCHRANE MILL ROAD  
PO BOX 18070  
PITTSBURGH, PA 15236-9986

THOMAS JORDAN  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY  
EARTH, ATMOSPHERIC & PLANETARY SCIENCES  
77 MASSACHUSETTS AVENUE, 54-918  
CAMBRIDGE, MA 02139

LAWRENCE LIVERMORE NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 808, MS L-207  
LIVERMORE, CA 94551

LAWRENCE LIVERMORE NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
LLNL  
PO BOX 808, MS L-175  
LIVERMORE, CA 94551

LAWRENCE LIVERMORE NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 808, MS L-208  
LIVERMORE, CA 94551

LAWRENCE LIVERMORE NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 808, MS L-195  
LIVERMORE, CA 94551

THORNE LAY  
UNIVERSITY OF CALIFORNIA, SANTA CRUZ  
EARTH SCIENCES DEPARTMENT  
EARTH & MARINE SCIENCE BUILDING  
SANTA CRUZ, CA 95064

DONALD A. LINGER  
DNA  
6801 TELEGRAPH ROAD  
ALEXANDRIA, VA 22310

LOS ALAMOS NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 1663, MS F665  
LOS ALAMOS, NM 87545

LOS ALAMOS NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 1663, MS C335  
LOS ALAMOS, NM 87545

KEITH MCLAUGHLIN  
MAXWELL TECHNOLOGIES  
P.O. BOX 23558  
SAN DIEGO, CA 92123

RICHARD MORROW  
USACDA/IVI  
320 21ST STREET, N.W.  
WASHINGTON, DC 20451

JAMES NI  
NEW MEXICO STATE UNIVERSITY  
DEPARTMENT OF PHYSICS  
LAS CRUCES, NM 88003

JOHN ORCUTT  
INSTITUTE OF GEOPHYSICS AND PLANETARY PHYSICS  
UNIVERSITY OF CALIFORNIA, SAN DIEGO  
LA JOLLA, CA 92093

LAWRENCE LIVERMORE NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 808, MS L-202  
LIVERMORE, CA 94551

LAWRENCE LIVERMORE NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 808, MS L-205  
LIVERMORE, CA 94551

ANATOLI L. LEVSHIN  
DEPARTMENT OF PHYSICS  
UNIVERSITY OF COLORADO  
CAMPUS BOX 390  
BOULDER, CO 80309-0309

LOS ALAMOS NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 1663, MS F659  
LOS ALAMOS, NM 87545

LOS ALAMOS NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 1663, MS D460  
LOS ALAMOS, NM 87545

GARY MCCARTOR  
SOUTHERN METHODIST UNIVERSITY  
DEPARTMENT OF PHYSICS  
DALLAS, TX 75275-0395

BRIAN MITCHELL  
DEPARTMENT OF EARTH & ATMOSPHERIC SCIENCES  
ST. LOUIS UNIVERSITY  
3507 LACLEDE AVENUE  
ST. LOUIS, MO 63103

JOHN MURPHY  
MAXWELL TECHNOLOGIES  
11800 SUNRISE VALLEY DRIVE SUITE 1212  
RESTON, VA 22091

CHARLES ODDENINO  
BUREAU OF MINES  
810 7TH ST. NW  
WASHINGTON, DC 20241

PACIFIC NORTHWEST NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 999, MS K6-48  
RICHLAND, WA 99352

PACIFIC NORTHWEST NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 999, MS K7-34  
RICHLAND, WA 99352

PACIFIC NORTHWEST NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 999, MS K6-40  
RICHLAND, WA 99352

PACIFIC NORTHWEST NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 999, MS K7-22  
RICHLAND, WA 99352

PACIFIC NORTHWEST NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 999, MS K5-72  
RICHLAND, WA 99352

PACIFIC NORTHWEST NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 999, MS K6-84  
RICHLAND, WA 99352

PACIFIC NORTHWEST NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
PO BOX 999, MS K5-12  
RICHLAND, WA 99352

FRANK PILOTTE  
HQ/AFTAC/TT  
1030 S. HIGHWAY A1A  
PATRICK AFB, FL 32925-3002

KEITH PRIESTLEY  
DEPARTMENT OF EARTH SCIENCES  
UNIVERSITY OF CAMBRIDGE  
MADINGLEY RISE, MADINGLEY ROAD  
CAMBRIDGE, CB3 0EZ UK

JAY PULLI  
RADIX SYSTEMS, INC.  
6 TAFT COURT  
ROCKVILLE, MD 20850

PAUL RICHARDS  
COLUMBIA UNIVERSITY  
LAMONT-DOHERTY EARTH OBSERVATORY  
PALISADES, NY 10964

DAVID RUSSELL  
HQ AFTAC/TTR  
1030 SOUTH HIGHWAY A1A  
PATRICK AFB, FL 32925-3002

CHANDAN SAIKIA  
WOODWARD-CLYDE FEDERAL SERVICES  
566 EL DORADO ST., SUITE 100  
PASADENA, CA 91101-2560

SANDIA NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
DEPT. 5704  
MS 0979, PO BOX 5800  
ALBUQUERQUE, NM 87185-0979

SANDIA NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
DEPT. 6116  
MS 0750, PO BOX 5800  
ALBUQUERQUE, NM 87185-0750

SANDIA NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
DEPT. 5791  
MS 0567, PO BOX 5800  
ALBUQUERQUE, NM 87185-0567

SANDIA NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
DEPT. 9311  
MS 1159, PO BOX 5800  
ALBUQUERQUE, NM 87185-1159

SANDIA NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
DEPT. 5704  
MS 0655, PO BOX 5800  
ALBUQUERQUE, NM 87185-0655

SANDIA NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
DEPT. 5736  
MS 0655, PO BOX 5800  
ALBUQUERQUE, NM 87185-0655

SANDIA NATIONAL LABORATORY  
ATTN: TECHNICAL STAFF (PLS ROUTE)  
DEPT. 6116  
MS 0750, PO BOX 5800  
ALBUQUERQUE, NM 87185-0750

THOMAS SERENO JR.  
SCIENCE APPLICATIONS INTERNATIONAL  
CORPORATION  
10260 CAMPUS POINT DRIVE  
SAN DIEGO, CA 92121



AVI SHAPIRA  
SEISMOLOGY DIVISION  
THE INSTITUTE FOR PETROLEUM RESEARCH AND  
GEOPHYSICS  
P.O.B. 2286, NOLON 58122 ISRAEL

MATTHEW SIBOL  
ENSCO, INC.  
445 PINEDA COURT  
MELBOURNE, FL 32940

JEFFRY STEVENS  
MAXWELL TECHNOLOGIES  
P.O. BOX 23558  
SAN DIEGO, CA 92123

DAVID THOMAS  
ISEE  
29100 AURORA ROAD  
CLEVELAND, OH 44139

LAWRENCE TURNBULL  
ACIS  
DCI/ACIS  
WASHINGTON, DC 20505

FRANK VERNON  
UNIVERSITY OF CALIFORNIA, SAN DIEGO  
SCRIPPS INSTITUTION OF OCEANOGRAPHY IGPP, 0225  
9500 GILMAN DRIVE  
LA JOLLA, CA 92093-0225

DANIEL WEILL  
NSF  
EAR-785  
4201 WILSON BLVD., ROOM 785  
ARLINGTON, VA 22230

RU SHAN WU  
UNIVERSITY OF CALIFORNIA SANTA CRUZ  
EARTH SCIENCES DEPT.  
1156 HIGH STREET  
SANTA CRUZ, CA 95064

JAMES E. ZOLLWEG  
BOISE STATE UNIVERSITY  
GEOSCIENCES DEPT.  
1910 UNIVERSITY DRIVE  
BOISE, ID 83725

DEFENSE TECHNICAL INFORMATION CENTER  
8725 JOHN J. KINGMAN ROAD  
FT BELVOIR, VA 22060-6218 (2 COPIES)

ROBERT SHUMWAY  
410 MRAC HALL  
DIVISION OF STATISTICS  
UNIVERSITY OF CALIFORNIA  
DAVIS, CA 95616-8671

DAVID SIMPSON  
IRIS  
1616 N. FORT MEYER DRIVE  
SUITE 1050  
ARLINGTON, VA 22209

BRIAN SULLIVAN  
BOSTON COLLEGE  
INSITUTE FOR SPACE RESEARCH  
140 COMMONWEALTH AVENUE  
CHESTNUT HILL, MA 02167

NAFI TOKSOZ  
EARTH RESOURCES LABORATORY, M.I.T.  
42 CARLTON STREET, E34-440  
CAMBRIDGE, MA 02142

GREG VAN DER VINK  
IRIS  
1616 N. FORT MEYER DRIVE  
SUITE 1050  
ARLINGTON, VA 22209

TERRY WALLACE  
UNIVERSITY OF ARIZONA  
DEPARTMENT OF GEOSCIENCES  
BUILDING #77  
TUCSON, AZ 85721

JAMES WHITCOMB  
NSF  
NSF/ISC OPERATIONS/EAR-785  
4201 WILSON BLVD., ROOM 785  
ARLINGTON, VA 22230

JIAKANG XIE  
COLUMBIA UNIVERSITY  
LAMONT DOHERTY EARTH OBSERVATORY  
ROUTE 9W  
PALISADES, NY 10964

OFFICE OF THE SECRETARY OF DEFENSE  
DDR&E  
WASHINGTON, DC 20330

TACTEC  
BATTELLE MEMORIAL INSTITUTE  
505 KING AVENUE  
COLUMBUS, OH 43201 (FINAL REPORT)

PHILLIPS LABORATORY  
ATTN: XPG  
29 RANDOLPH ROAD  
HANSCOM AFB, MA 01731-3010

PHILLIPS LABORATORY  
ATTN: GPE  
29 RANDOLPH ROAD  
HANSCOM AFB, MA 01731-3010

PHILLIPS LABORATORY  
ATTN: TSML  
5 WRIGHT STREET  
HANSCOM AFB, MA 01731-3004

PHILLIPS LABORATORY  
ATTN: PL/SUL  
3550 ABERDEEN AVE SE  
KIRTLAND, NM 87117-5776 (2 COPIES)